



MADE IN DENMARK



EffiMat[®] Datasheet


112018


EFFIMAT
Storage Technology

Datasheet **EFFIMAT**[®]

Machine heights:

3000 mm to 12.000 mm
(Free space requirement between ceiling and machine top for installation is an additional 150 mm)

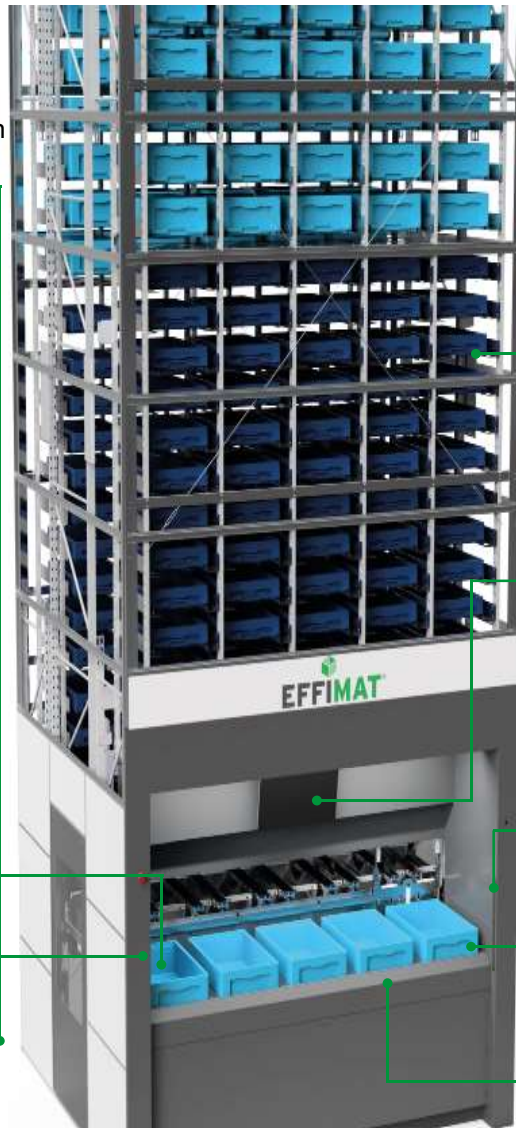

Cladding:

Palfoam, white,
RAL 9010, up to 3,1 m

Touch screen:

22" operator touch screen

Security:

Operator-friendly
integrated light curtain

Boxes:

400 x 600 mm at varible
height, from 50 to 400 mm

Access height opening:

Floor to Table Top: 800 mm

Max load pr. box:

25 kg

Max deflection:

< 1 mm at 25 kg

Goodsheight sensor

Presented boxes an hour:

avarage 250 boxes/h

Fuse:

20A

Power consumption at 400V:

13A

CE directives:

Machine-, Low voltage- and
EMC directives

Standards:

EN 15095, EN 15512, ISO 6336,
ISO 12100

Electrical specifications:

PLC with motion controls

Power supply:

380-480VAC 3 phase, Neutral, PE

Max load:

625 kg per meter

Temperature:

Operations by 5 to 40 Celsius
(40 to 104 Fahrenheit)

It is possible to combine multiple towers.




Options:

- EffiFlex™ - Connection with conveyor systems, robots etc.
- Dust roof
- Full cladding
- Industrial gateway for remote monitoring
- Internal shutter door
- External shutter door with key switch
- ESD Protection
- Additional access Opening
- EffiSoft™ software
- EffiCare™ service concept
- Plexiglass cladding for transparency
- Power outlets for scanners and printers
- 15" touch screen to be placed on the side



Please let your local representative guide and help you fulfilling your storage and automation needs.

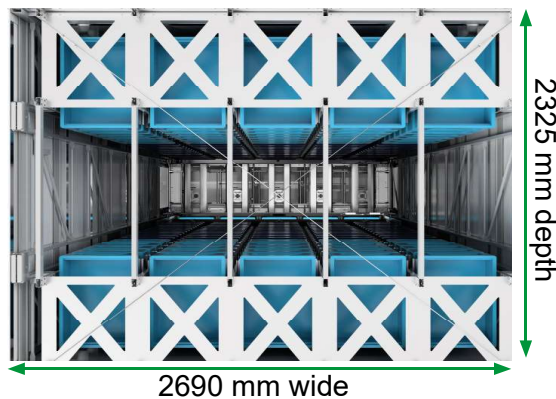

ARE YOU INTERESTED IN LEARNING
MORE ABOUT EFFIMAT®?

Contact us via

+45 7199 4800

info@effimat.com

EFFIMAT
Storage Technology

EffiMat Storage Technology A/S
Emil Neckelmanns Vej 15C
DK – 5220 Odense SØ
+45 7199 4800 · info@effimat.com