



MADE IN DENMARK



ClassicMat™ Datasheet



EFFIMAT

Storage Technology

Datasheet CLASSICMAT™

Machine heights:

3000 mm to 20.000 mm
(Free space requirement between ceiling and machine top for installation is an additional 150 mm)




Lift system:
Rack & pinion

Lift speed:
Payload adjustable speed

Max load pr. tray:
400 kg
(500 kg option possible)

Configuration of up to 5 different goods heights possible.
Goods height up to 650 mm

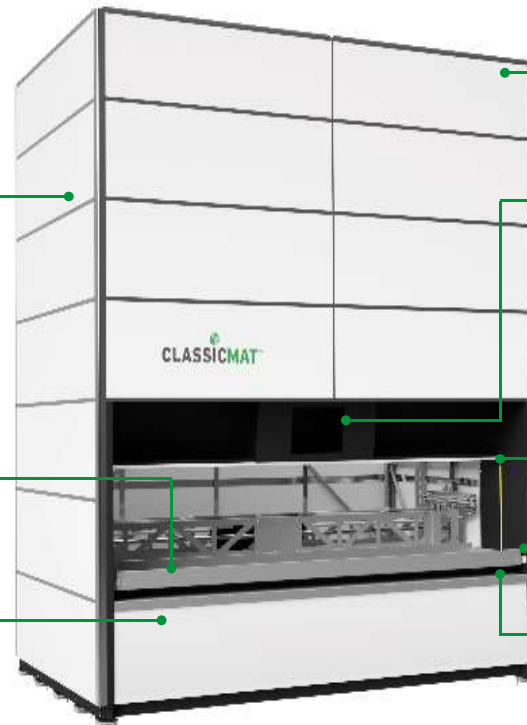

Cladding:
FOAMALUX, white, RAL 9010

Touch Screen:
22" operator touch screen

Security:
Operator-friendly integrated light curtain

Tray Position in opening:
Floor to Tray Bottom: 815 mm

Access height opening:
Floor to Table Top: 725 mm

Humidity:
up to 70 RH%

Tray construction:
Galvanized steel

CE directives:
Machine-, Low voltage- and EMC directives

Standards:
EN 15095, EN 15512, ISO 6336, ISO 12100

Power consumption at 400V:
13A

Electrical specifications:
PLC with motion controls

Power supply:
380-480VAC 3 phase, Neutral, PE


Max load:
40.000 kg
(60.000 kg with high load option)

Temperature:
Operations by 5 to 40 Celsius
(40 to 104 Fahrenheit)

Machine footprint measures based on usable storage area:




Tray	Depth			
	650 mm	820 mm	1000 mm	1200 mm
Width 2000 mm	2348 x 2468	2348 x 2793	2348 x 3333	2348 x 3933
2500 mm	2848 x 2468	2848 x 2793	2848 x 3333	2848 x 3933
3000 mm	3348 x 2468	3348 x 2793	3348 x 3333	3348 x 3933
3250 mm	3598 x 2468	3598 x 2793	3598 x 3333	3598 x 3933
3500 mm	3848 x 2468	3848 x 2793	3848 x 3333	3848 x 3933
3660 mm	3708 x 2468	3708 x 2793	3708 x 3333	3708 x 3933
4000 mm	4348 x 2468	4348 x 2793	4348 x 3333	4348 x 3933

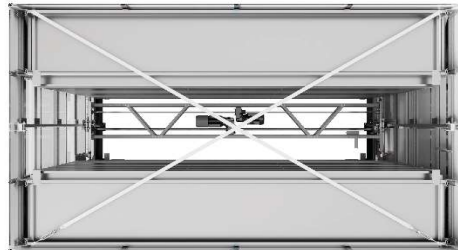

Options:

- High load option
- EffiTilt™
- Pointer
- Confirm button
- Dust roof
- Internal shutter door
- External shutter door with key switch
- Intelligent height optimisation
- ESD protection
- Additional access opening
- Manual tray roller
- EffiSoft™ software
- EffiCare™ service concept
- Plexiglass cladding for transparency
- Power outlets for scanners and printers
- Industrial gateway for remote monitoring
- Pop-up and much more

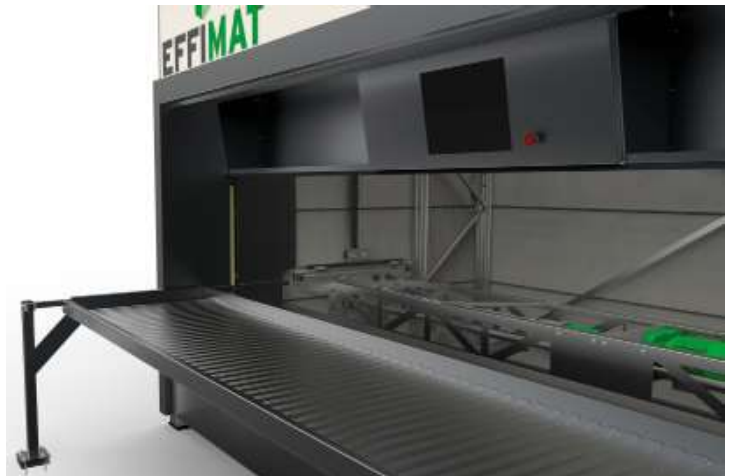

Please let your local representative guide and help you fulfilling your storage needs.

ARE YOU INTERESTED IN LEARNING MORE ABOUT CLASSICMAT™?

Contact us via
 +45 7199 4800
 info@effimat.com



EffiMat Storage Technology A/S
 Emil Neckelmanns Vej 15C
 DK – 5220 Odense SØ
 +45 7199 4800 · info@effimat.com